

CONDITION REPORT - ELECTRIC

Manufacturer	Model	Year	Serial Number		
HYSTER COMPANY	E40HSD2	2014	B219N02517M		
Mast			Hours	5605	
Mast Height Lowered			Voltage	36 Volt	
Mast Height Raised			Attachment		
Hydraulic Control Valve			Directional Control		
Capacity			Tires		
Mast Condition			Steering Pump Condition		
Mast Comments			Steering Pump Comments		
Lift Cylinder Condition			Hydraulic Pump Condition		
Lift Cylinder Comments			Hydraulic Pump Comments		
Tilt Cylinder Condition			Hydraulic Motor Condition		
Tilt Cylinder Comments			Hydraulic Motor Comments		
Carriage Condition			Control System Condition		
Carriage Comments			Control System Comments		
Load Backrest Condition					
Load Backrest Comments			Drive Motor Condition		
Forks Condition			Drive Motor Comments		
Forks Comments			Differential Condition		
			Differential Comments		
Overhead Guard Condition			Drive Tires % Remaining		
Overhead Guard Comments			Drive Tires Condition		
			Steer Tires % Remaining		
Seat Condition	Not applicable		Steer Tires Condition	Chunked	
Seat Comments			Steer Axle Condition		
			Steer Axle Comments		
General Appearance Condition			Brakes Condition		
General Appearance Comments	Rust		Brakes Comments		
General Comments			Battery Present	Yes	
NO FIRE EXT PRESENT - NOT SURE IF S	SPEC'D WITH ONE UPON DELIVERYSTEER TIRE	ES - SPLIT IN HALF	Charger Present		
(LEFT SIDE)					
			Electrical Condition		
			Electrical Comments		

Inspector Company Name	BRIGGS EQUIPMENT	Inspection Date	6/7/2019 3:44:49 PM
Inspector Name	Christian Dano		



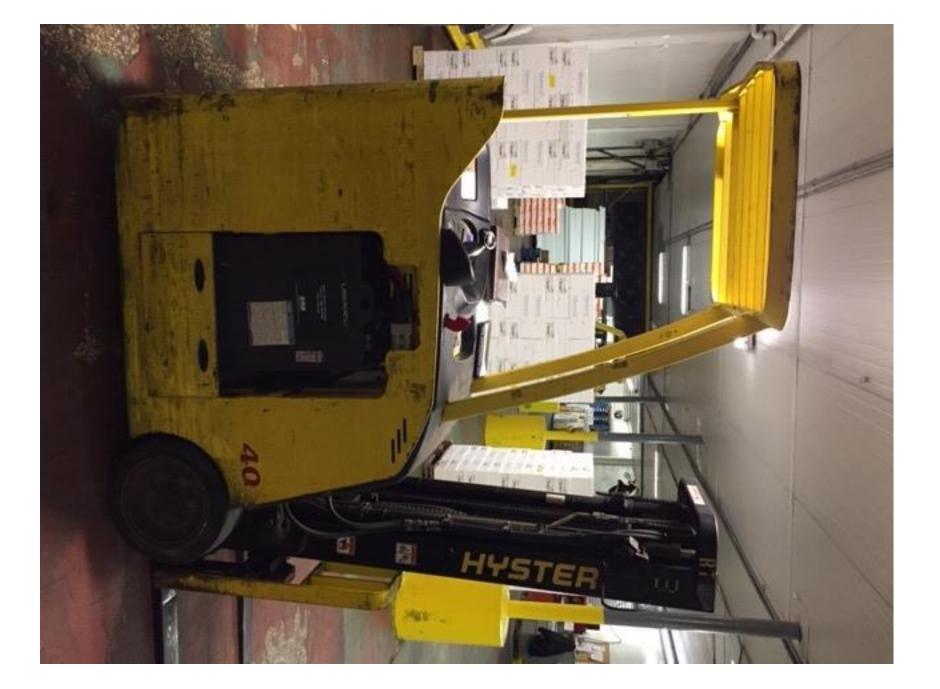

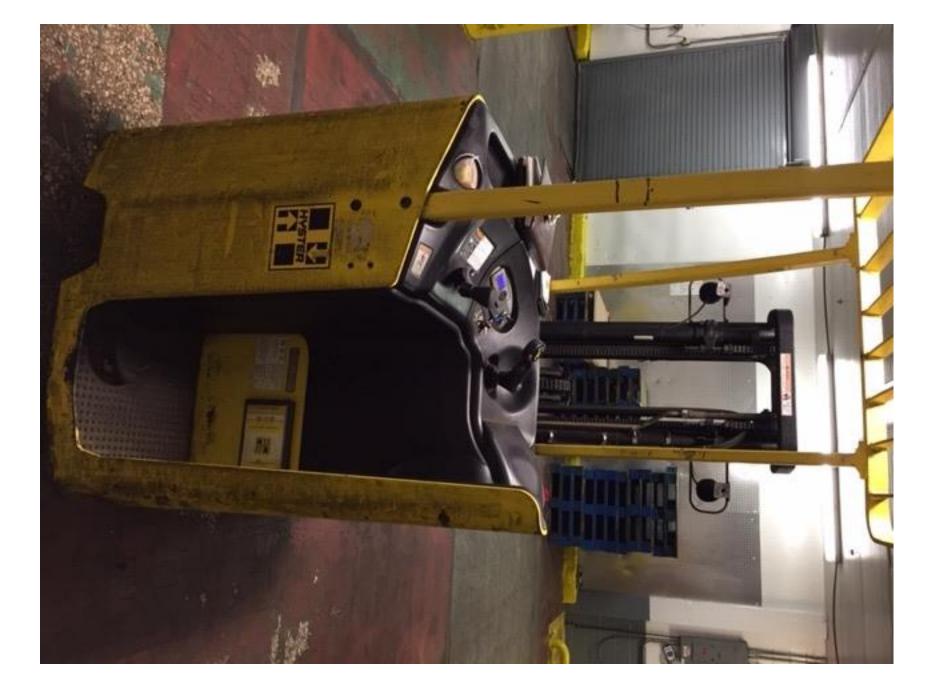















Mechanics Only Read Operating Manual located on seat or in

compartment operators

Size

18X7X12-1/8 Cushion

10.00X5X6.5 Poly 92 Duro

rious injury or death! llure to follow operating, pection, and maintenance ructions can cause CAPACITY WITH MAST EQUIPPED AS SHOWN VERTICAL AND

Lift Truck Model E40HSD2-21 Senal No. B219N02517M

Attachment: 978 mm (39 in) SS Crg + 1067 mm (42 in) Forks

rained Operators and Allowable Battery V/L 1220 kg (2690 lb) to 1380 kg (3050 lb) Tread Width 890 mm (35 m) Truck Wt. Max Battery:4560 kg (10050 lb) Max A.H.(6 Hr Rt)1240 Truck Wt. Less Battery 3180 kg (7000 lb) Back Till 5 Degrees Type E 36 Volts

Tire Front Rea

(24 in) A	(24 in)	4750mm (187 in)	1750 kg (3850 lb)
n. B Dim. C C	Dim. B	Dim. A	CAPACITY