
CONDITION REPORT - ELECTRIC

Manufacturer	Model ERP030VT	Year 2013	Serial Number		
YALE MANUFACTURER			G807N04769L		
Mast	3 Stage FFL (Triplex)		Hours	9047	
Mast Height Lowered	82		Voltage	36 Volt	
Mast Height Raised	187		Attachment		
Hydraulic Control Valve	3-Function		Directional Control	Lever	
Capacity	3000		Tires	Solid Pneumatic	
Mast Condition			Steering Pump Condition		
Mast Comments			Steering Pump Comments		
Lift Cylinder Condition			Hydraulic Pump Condition		
Lift Cylinder Comments			Hydraulic Pump Comments		
Tilt Cylinder Condition			Hydraulic Motor Condition		
Tilt Cylinder Comments			Hydraulic Motor Comments		
Carriage Condition			Control System Condition		
Carriage Comments			Control System Comments		
Load Backrest Condition	Damaged				
Load Backrest Comments	Bent		Drive Motor Condition		
Forks Condition	20		Drive Motor Comments		
Forks Comments			Differential Condition		
			Differential Comments		
Overhead Guard Condition			Drive Tires % Remaining	60	
Overhead Guard Comments			Drive Tires Condition		
			Steer Tires % Remaining	30	
Seat Condition	Damaged		Steer Tires Condition	Chunked	
Seat Comments	Torn		Steer Axle Condition	onaou	
			Steer Axle Comments		
General Appearance Condition	Fair		Brakes Condition		
General Appearance Comments	Sheet metal damage		Brakes Comments		
General Appearance Comments	Sheet metal damage		Diakes Comments		
General Comments		Battery Present	Yes		
Outer Frame of Side-Shifting Carriage is BentMissing Rear Reflector Assemblies Steering Wheel Spinner Knob Broke		Charger Present	No		
			Electrical Condition	Dead / low battery	
			Electrical Comments	•	

Inspector Company Name	Insley McEntee	Inspection Date	8/13/2019 8:19:50 AM	
Inspector Name	Greg Owens			





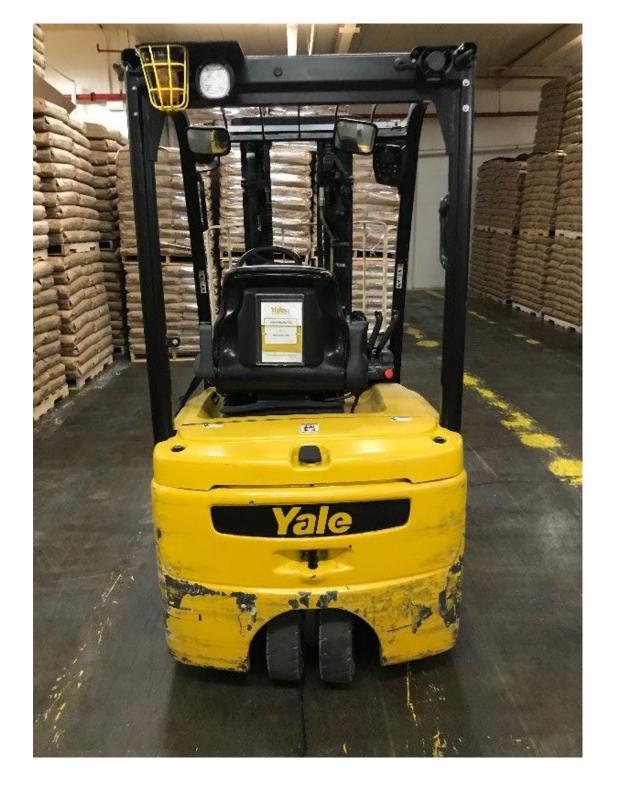



Lift Truck Model ERP030VTN36TE082 Serial No. G807N04769L

Attachment: 978 mm (39 in) SS Crg + 1067 mm (42 in) Forks

Truck Wt. Less Battery 2370 kg (5220 lb) Type E 36 Volls Truck Wt. Max Battery 3510 kg (7720 lb) Max A.H.(6 Hr Rt) 880

Allowable Battery Wt. 910 kg (2000 lb) to 1130 kg (2500 lb)

Tread Width 880 mm (34.9 in) Back Tilt 5 Degrees

Tire

Front

18X7-8 Solid

Size Pressure Rear

15X4.5-8/3.0 Dual Solid

ST

MAXIMUM	Load Height Dim. A	Load Dim. B	Center Dim. C	t l
1360 kg	4750mm	610 mm	610 mm	A BI
(3000 lb)	(187 in)	(24 in)	(24 in)	
kg	mm	mm	mm	j 4
(lb)	(in)	(in)	(in)	